

CRYDOM
Control over power

Series D2W



2-3.5 Amps • 120/240 Vac • AC Output SIP

- Triac Output
- Printed Circuit Board Mount
- Internal Snubber
- Zero Voltage Switching

The D2W Series features an epoxy-coated package that provides exceptional environmental protection. Pinouts are compatible with Series 6 and OAC type I/O modules.

Manufactured in Crydom's ISO 9002 Certified facility for optimum product performance and reliability.

CURRENT DERATING CURVE

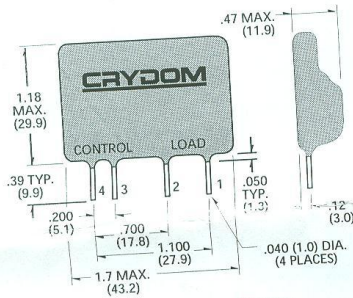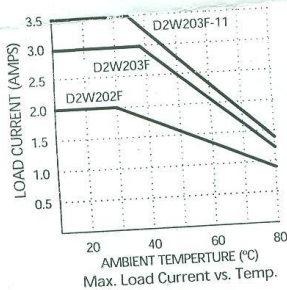

PIN 1: AC LOAD
PIN 2: AC LOAD
PIN 3: +DC CONTROL
PIN 4: -DC CONTROL

All dimensions are in inches (millimeters)

MODEL NO.	D2W202F	D2W203F	D2W203F-11
INPUT SPECIFICATIONS ①			
Control Voltage Range	3-32 Vdc	3-32 Vdc	3-32 Vdc
Nominal Input Impedance	1500 Ohm	1500 Ohm	1500 Ohm
Typical Input Current @ 5 Vdc	3.0 mAdc	3.0 mAdc	3.0 mAdc
Must Turn On Voltage	3.0 Vdc	3.0 Vdc	3.0 Vdc
Must Turn Off Voltage	1.0 Vdc	1.0 Vdc	1.0 Vdc

OUTPUT SPECIFICATIONS ①			
Operating Voltage Range (47-63 Hz)	24-280 Vrms	24-280 Vrms	24-280 Vrms
Load Current Range	.06-2.0 Arms	.06-3.0 Arms	.06-3.5 Arms
Transient Over-Voltage	600 Vpk	600 Vpk	600 Vpk
Max. Surge Current (16.6ms)	28 Apk	70 Apk	80 Apk
Min. Off-State dv/dt @ Max. Rated Voltage ③	200 V/μsec	200 V/μsec	200 V/μsec
Max. Off-State Leakage @ Rated Voltage	8 mArms	8 mArms	8 mArms
Max. On-State Voltage Drop @ Rated Current	1.4 Vpk	1.4 Vpk	1.4 Vpk
Max. Turn-On Time	1/2 cycle	1/2 cycle	1/2 cycle
Max. Turn-Off Time	1/2 cycle	1/2 cycle	1/2 cycle
Power Factor (Min.) With Max. Load	0.5	0.5	0.5

GENERAL SPECIFICATIONS	
Dielectric Strength ②	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc ②	10 ⁹ Ohm
Max. Capacitance	10 pF
Ambient Operating Temperature Range	-30 to 80°C
Ambient Storage Temperature Range	-30 to 125°C

MECHANICAL SPECIFICATIONS	
Weight: (typical)	0.6 oz. (17 g)
Encapsulation:	Thermally Conductive Epoxy

©1998 CRYDOM CORP. Specifications subject to change without notice.

GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Dielectric and insulation resistance are measured between input and output.
- ③ Off-State dv/dt test method per EIA/NARM standard RS-443.

For recommended applications and more information contact:
 USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280
 Crydom Corp. 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com
 WEB SITE: <http://www.crydom.com> **FASTFAX Product Information:** (888) 267-9191
 UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close,
 Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU
 GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,
 Gewerbegebiet Im Schachen D-66687 Nunkirchen, Germany • e-mail: Vertrieb@crydom.com

APPROVALS

UL E116950
CSA LR81689



FastFax Document No. 116
SERIES D2W 032698, PAGE 1 OF 1

